


## Special-purpose rotary unit HSR / F


The horizontal rotary unit carries out a reversing, horizontal motion and allows a more uniform electroplating of diamond or CBN grinding wheels and band saws. The rotary unit is typically mounted onto a lifting/lowering table, its flexible drilling pattern for the fixing lugs however allows it to be mounted directly into the plating tank.

The reversing speed is adjusted by the motor control unit which is integrated into the corresponding electroplating control regulates. Diamond plating cassettes or other devices can be clamped to the holding platter by means of the bayonet catch.

The rotary units are available in different sizes and can be customized to your specific tank dimensions.

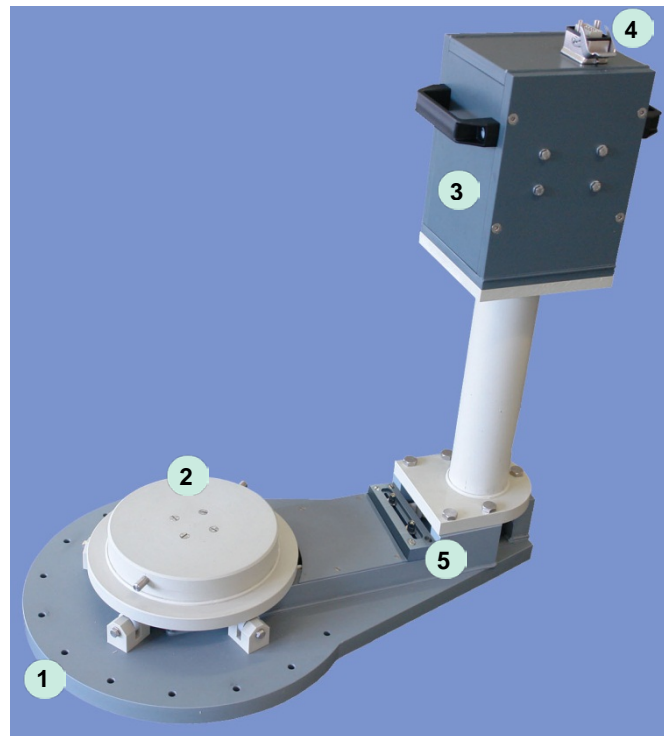

1. Base plate with perforations for mounting lugs
2. Rotating holding platter with bayonet catch
3. Motor / case
4. Connector for control
5. Tension adjuster for timing belt

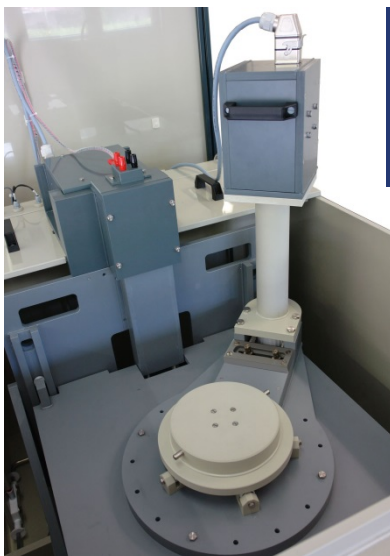

Horizontal rotation unit mounted onto lifting/lowering table