

金刚石电镀设备 DBA XX-D23

Diamond Electro-Plating Plant DBA XX-D23

用于生产金刚石电镀的牙钻，磨棒，智能手机显示屏铣刀和外直径不超过 150mm 的砂轮，共有 2 到 10 个电镀站。

For the production of electro-plated diamond dental burrs, grinding pins, Smartphone-display cutters and grinding wheels with an outer diameter of up to 150 mm with 2 to 10 electro-plating stations.

前视图 Front view



后视图 Rear view





1. 金刚石电镀调控 DBS XXA/45(10 个.)
Diamond electro-plating control DBS XXA/45(10 pcs)
 - 电流 Current
 - 电压 Voltage
 - 泄漏电流 Leak current
 - 计时 Time count
2. 操作控制和调节装置 (PRS 745)
Process control and regulation unit (PRS 745)
 - 温度 Temperature
 - pH 值 pH value
 - 槽液面稳定 Level stabilisation
 - 电镀液恒定 Electrolyte stabilisation
 - 安全传感器 Safety sensors
 - 安培/分钟计数器 Amin counter
3. 金刚石电镀装置 (DBE, 2 台) 每台具有 5 个电镀站
Diamond electro-plating unit (DBE, 2 pcs) with 5 electro-plating stations each
4. 三联式静态漂洗槽 (KSP)
Three-cascade standing sink unit (KSP)

注：所有图示均是示例。
实际产品可能会和图片有差别。
该图展示的是 DBA 10-D23 设备。
Please note: All illustrations are examples.
The product may differ from the illustrations.
The system shown is a type DBA 10-D23 plant.



带有维持电镀液稳定的储存池，PH值调节，剂量泵，M50 循环泵，2 X 10“烛式过滤器，流量计和流量阀的 PRS 装置的内视图。

Inside view of the PRS with reservoirs for electrolyte stabilization and pH regulation, dosing pumps, circulation pump M50, filtering cartridge unit 2 x 10", flow meter and flow adjustment valve

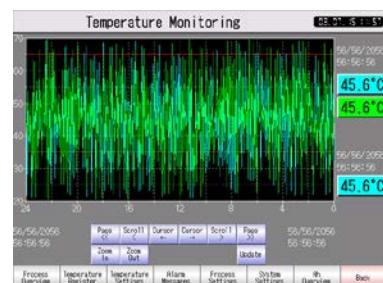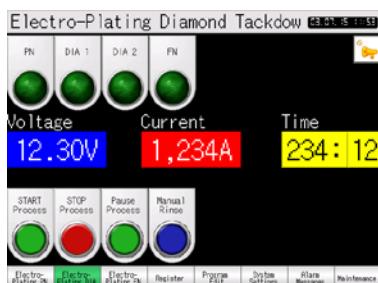

触摸屏操作界面（PRS/DBS）示例
Examples of Touch screen operator surfaces (PRS /DBS)



通过终端操作 触摸屏设置和监控槽参数（PRS 调控）

Adjustment and monitoring of the bath parameters by the Touch screen operators' terminal (PRS control)



通过终端操作触摸屏调控3阶自动流程操作和预设电镀参数(DBS XXA-45 调控)

3-stage automatic process-run control and preset of the electro-plating parameters by the Touch screen operators' terminal